



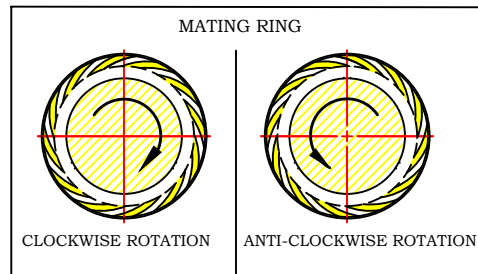

## ARRANGEMENT -2

### API STANDARD 682, 4th EDITION MECHANICAL SEAL CONFIGURATION 2NC-CS, GAS BUFFER FLUID OR NO BUFFER FLUID

#### SUPER SEAL TYPE.- SA 2392 CS

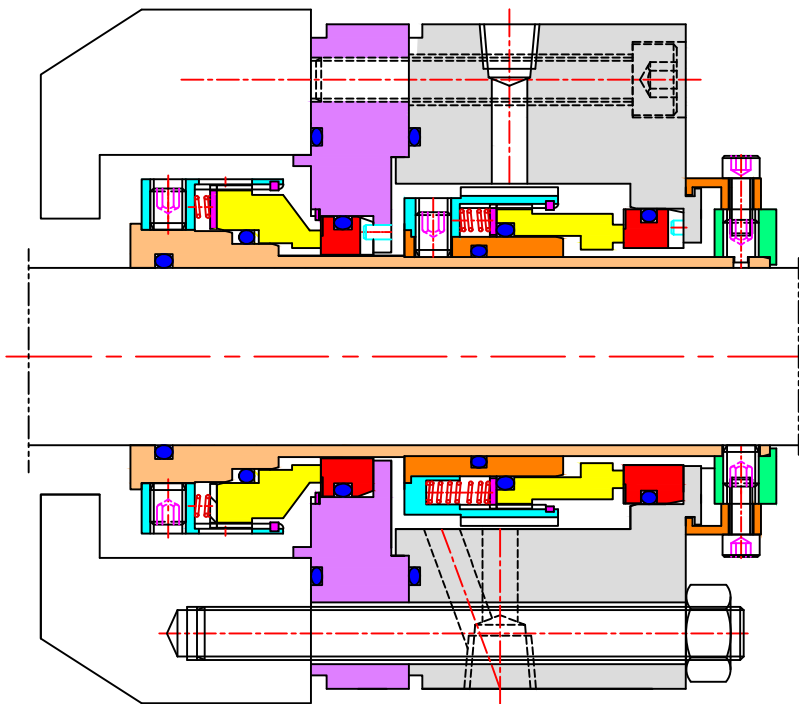

Shaft Size : 20 to 120 mm.

Pressure : Vacuum to 40 Kg/cm<sup>2</sup>

Temp : -40° to 200°C

TWO SEALS PER CARTRIDGE ASSEMBLY WITH A CONTALNMENT SEAL CHAMBER WHICH IS AT A PRESSURE LESS THAN THE SEAL CHAMBER PRESSURE.

*Think safety \* Think super*