ARRANGEMENT -3

API STANDARD 682, 4th EDITION
MECHANICAL SEAL CONFIGURATION 3CW-FB,
LIQUID BARRIER FLUID

SUPER SEAL TYPE.- SA 3190 FB

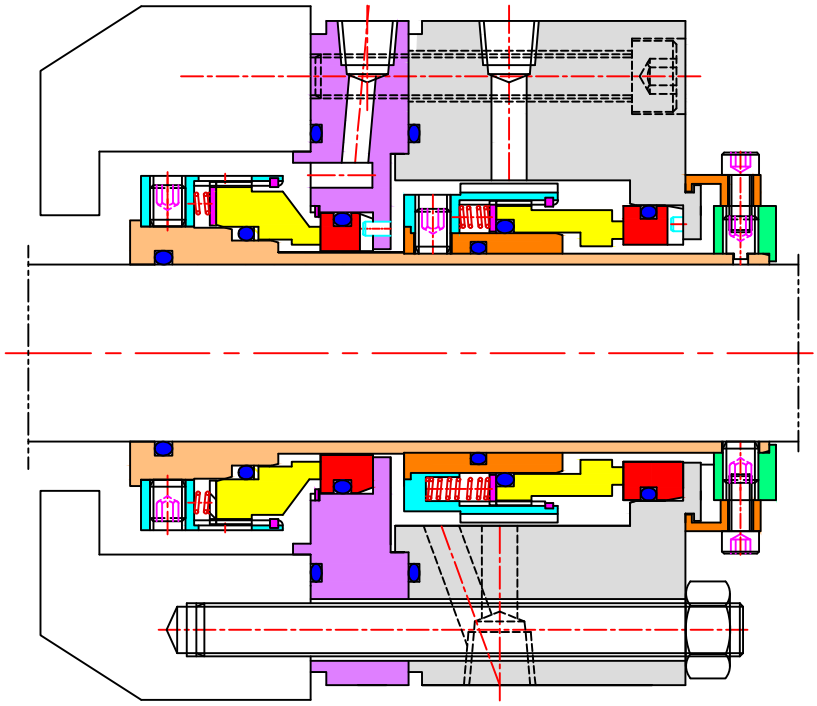

Shaft Size : 20 to 120 mm.

Pressure : Vacuum to 40 Kg/cm2

Temp : -40° to 200°C

TWO SEALS PER CARTRIDGE ASSEMBLY THAT UTLLLZE AN EXTERNALLY SUPPLLED BARRIER FLUID
CONTACTING WET SEALS IN A FACE TO BACK CONFIGURATION.

*Think safety * Think super*