




## API PLAN - 72

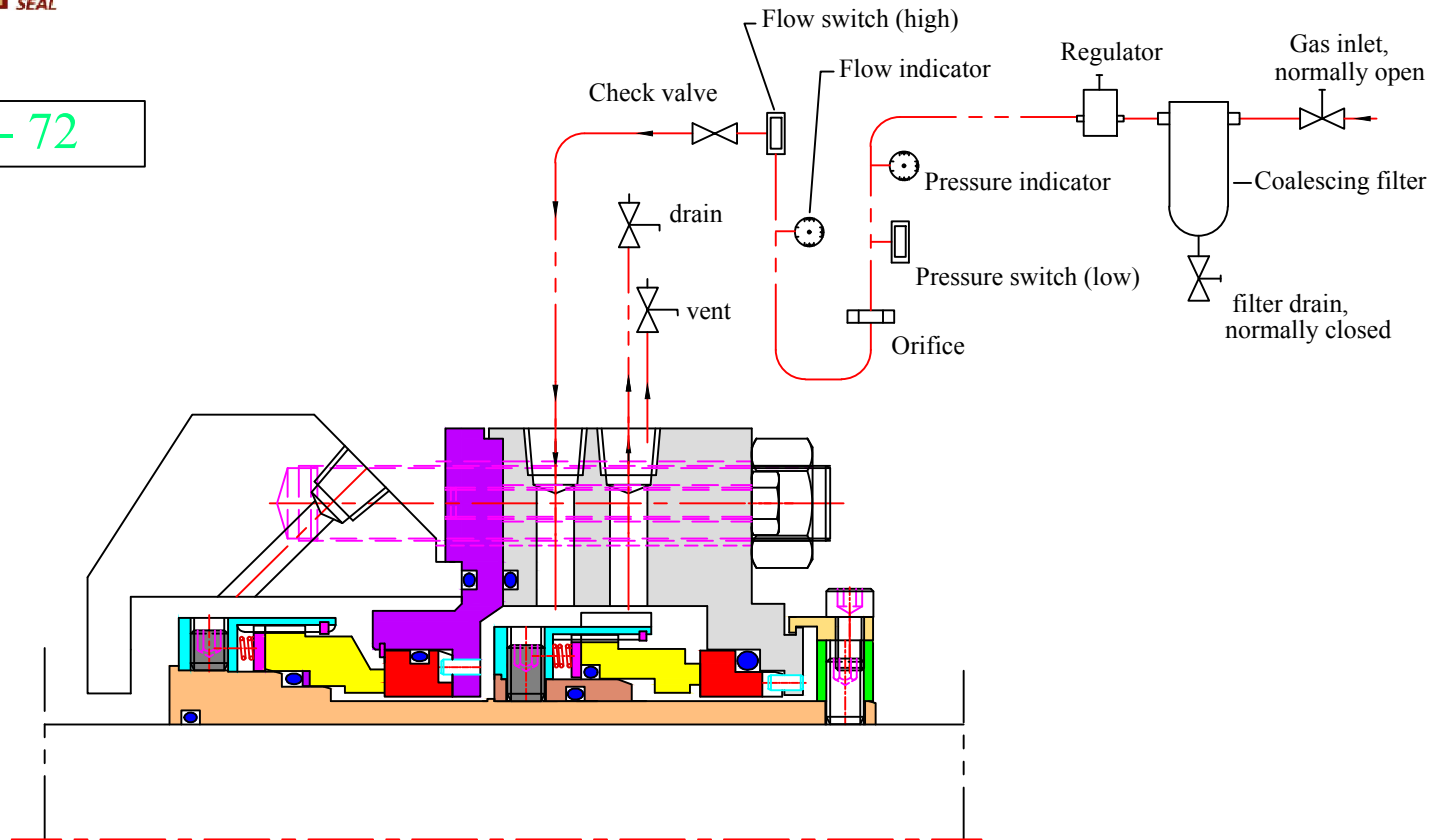

- Double mechanical seal tandem arrangement
- Buffer gas may be used alone to dilute seal leakage or in conjunction with plan 75 or 76 to help sweep leakage in to close connection system.
- Zero process emissions.
- Safety backup to primary seal.

- Used with double unpressurized containment seals
- High vapor pressure fluids, light hydrocarbons.
- Hazardous /toxic fluids.
- Clean, non-polymerizing, non-oxidizing fluids.
- Used in combination with plan 75 and /or plan 76.